

CarpeTwin® 14 & 18

Upright Vacuums



Advance

FACT SHEET



The CarpeTwin® 14 and 18 upright carpet vacuums clean a 14 or 18 inch (36 or 46 cm) path, shaking loose and drawing out imbedded dirt and grit that shorten carpet life.

Five-stage filtration on the CarpeTwin keeps dirt and dust under control. It begins with a two-ply 244 cubic inch (4 L) paper filter/collector bag. (An optional cloth filter/collector bag is available.) The vac motor is filter protected so it will last longer. The final filter is a hospital grade filtration media. It protects your indoor air quality by filtering to 0.1 microns and exhausting only clean air. Sound insulation also keeps the CarpeTwin vacs hospital quiet, at only 69 dB A. With two-motor design, separate motors drive the brush and the vacuum. The brush motor has electronic overcurrent protection, and a thermal relief valve protects the vacuum motor.

The 5,000 rpm chevron bristle brush is removable, and is motor-driven by a gear belt that won't slip or wear out.

The reach-under design allows the CarpeTwin to lie completely flat for vacuuming under furniture. Light handle weight and carrying handle makes it easy to use and transport.

For efficiency and convenience, the CarpeTwin has a built-in hose and telescopic wand that permits off-the-floor cleaning. A crevice tool and round dusting tool are stored onboard.

STANDARD ACCESSORIES INCLUDE

- 4:1 stretch hose
- 36 inch (91 cm) telescopic wand extends to 95 inch (241 cm)
- Crevice tool
- Round dusting tool

TYPICAL APPLICATIONS INCLUDE

- Offices
- Schools
- Hotels / Motels
- Healthcare Centers
- Retail Outlets
- Restaurants


Meets Hospital Sound and Filtration Requirements —

- Quiet — only 69 dB A
- 5-stage filtration exhausts only clean air into environment
- Final stage is hospital grade filtration media which filters to —
 - 0.1 microns @ 95% efficiency
 - 0.2 microns @ 96% efficiency
 - 0.3 microns @ 97% efficiency
 - 0.4 microns @ 99% efficiency



Advance CarpeTwin® 14 & 18


Upright Vacuums

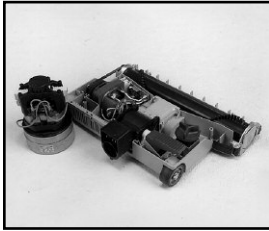

The power brush motor has electronic overcurrent protection; and thermal relief protects the vac motor




5-stage dust filtration for high efficiency, high loading capacity and moisture & heat resistance

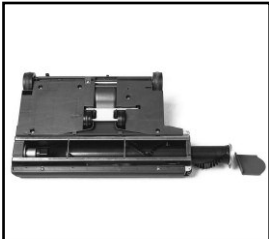

Carpet brush removes with-out tools. Its durable, solid plastic core is balanced to eliminate vibration. It's inexpensive and easy to replace



5,000 rpm motorized carpet brush is driven by a toothed timing belt that can't slip. Dual ball bearings are protected for long life

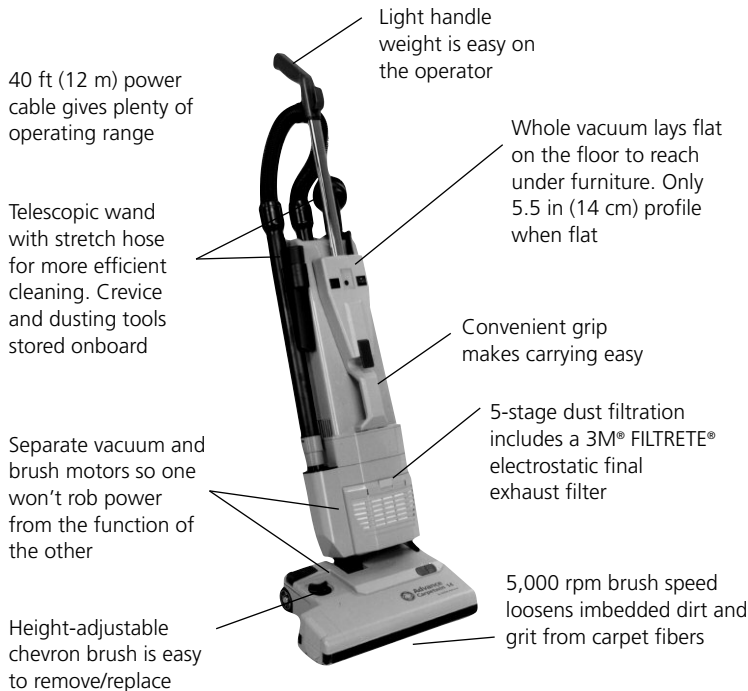

Only 69 dB A Sound Level

Defining Cleaning Innovation...

- Our products are designed using innovative technology that increases productivity and drives down the cost to clean.
- You can get expert service and maintenance for your Advance machines from factory-trained personnel around the world. Fast parts delivery, too.
- Maintain peak performance with Nilfisk Genuine OEM Parts.

Nilfisk Genuine OEM Parts

Technical Specifications

Vacuum Motor	1 hp, 115 V/60 Hz, 750 W, 2 stage, 88 cfm (2,492 L/min), 77 in (196 cm) sealed waterlift w/1.5 in (38 mm) orifice. Includes thermal overload protection. – BOTH MODELS	
Brush Motor	<u>Model 14</u> – 0.24 hp, 115 V/60 Hz, 180 W, <u>Model 18</u> – 0.27 hp, 115 V/60 Hz, 200 W, Electronic overload protection on brush motors. – BOTH MODELS	
Brush Speed	5,000 rpm, driven by toothed timing belt.	
Brush	Single row nylon bristles in a 360° chevron pattern, with variable brush height.	
Total Power	<u>Model 14</u> – 115 V/900 W, 8.3 amps. <u>Model 18</u> – 115 V/920 W, 8.4 amps.	
Cleaning Width	<u>Model 14</u> – 14 in (36 cm) <u>Model 18</u> – 18 in (46 cm)	
Air Filtration	5-stages, 2-ply paper filter bag, inlet foam filter, carbon brush exhaust filter, electrostatic exhaust filter. – BOTH MODELS	
Bag Capacity	2-ply filter bag has 244 in ³ (4 L) capacity. – BOTH MODELS	
Power Cable	40 ft (12 m), 18/3 wire, double insulated. – BOTH MODELS	
Sound Level	69 dB A with both motors running. – BOTH MODELS	
Weights	Model 14	Model 18
	Net — 17.5 lb (7.9 kg) Shipping — 23 lb (10.4 kg)	18.5 lb (8.4 kg) 24 lb (10.8 kg)
Dimensions	Model 14	Model 18
	Width (o/a) — 15 in (38 cm)	19.5 in (50 cm)
	Length — 10 in (25 cm)	10 in (25 cm)
	Height — 47 in (119 cm)	47 in (119 cm)
Part Numbers	CarpeTwin® 14 – 56 704 200 CarpeTwin® 18 – 56 704 201	

Specifications are subject to change without notice.



Advance

14600 21st Avenue North
Plymouth, MN 55447-3408
www.advance-us.com
Phone: 800-850-5559
Fax: 800-989-6566

240 Superior Boulevard
Mississauga, Ontario, Canada L5T 2L2
www.nilfisk-advance.com
Phone: 905-564-1149 or 800-668-8400
Fax: 905-564-1030 or 800-263-5111

©2010, Nilfisk-Advance, Inc.,
Printed in U.S.A., Form L2198A 6-10

